


Standardization

As can be seen from the table below, circulated-air chamber dryers are produced in types H₂ – H₁₇. Special designs with other dimensions are possible.

Standardization means low-cost production and short delivery times due to the standardized components. Special versions are made possible by an expansion of the model range, wherein the main dimensions are graduated in each case in steps of 200 mm.

For straight-through operation several dryers can be placed one after another.

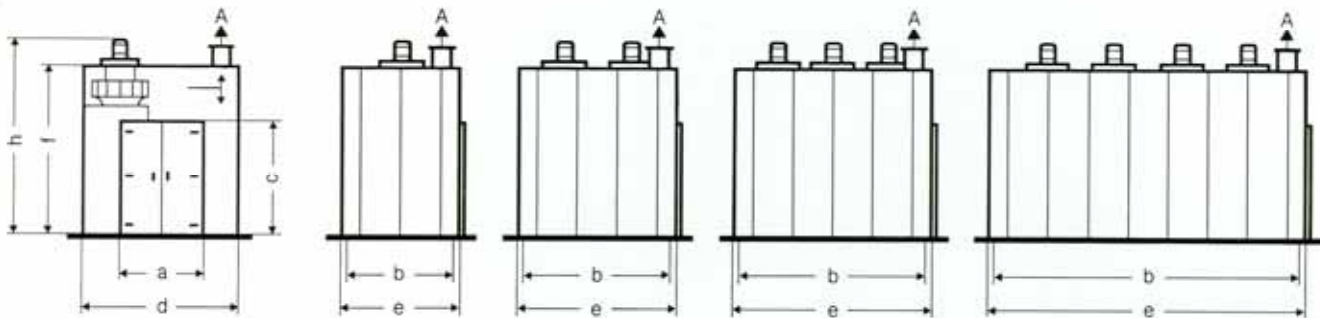

A = Exhaust directed over roof,
provided by customer
h = Height is different
when V-belt drive is used

Type	a	b	c	d	e	f	h	Useful space m ³	Air rate m ³ /h	Motor kW	Tray area m ²	
											Manual charging m ²	Trolley charging m ²
H ₂	800	1000	1800	1706	1206	2503	2760	1,44	9 000	3	11,0	8,5
H ₃	800	1000	2200	1706	1206	2903	3200	1,76	10 900	3	14,0	11,0
H ₄	1000	1200	1800	1906	1406	2503	2800	2,16	10 900	3	16,8	13,5
H ₅	1000	1200	2200	1906	1406	2903	3280	2,64	13 800	4	21,3	17,3
H ₆	1200	1200	1800	2106	1406	2503	2800	2,59	10 900	3	20,2	16,5
H ₇	1200	1200	2200	2106	1406	2903	3280	3,17	13 800	4	25,6	21,2
H ₈	1200	1600	1800	2106	1806	2503	2880	3,46	13 800	4	27,3	20,5
H ₉	1200	1600	2200	2106	1806	2903	3240	4,22	18 500	7,5	34,6	26,4
H ₁₀	1200	2000	1800	2106	2206	2503	2760	4,32	18 000	2 x 3	34,4	25,6
H ₁₁	1200	2000	2200	2106	2206	2903	3200	5,28	21 800	2 x 3	43,6	32,9
H ₁₂	1200	2200	1800	2106	2406	2503	2760	4,75	18 000	2 x 3	37,9	28,7
H ₁₃	1200	2200	2200	2106	2406	2903	3200	5,81	21 800	2 x 3	48,0	36,8
H ₁₄	1400	2000	1800	2306	2206	2503	2760	5,04	18 000	2 x 3	40,2	30,3
H ₁₅	1400	2000	2200	2306	2206	2903	3200	6,16	21 800	2 x 3	51,0	39,0
H ₁₆	1400	2400	1800	2306	2606	2503	2800	6,05	21 800	2 x 3	48,5	37,7
H ₁₇	1400	2400	2200	2306	2606	2903	3280	7,39	27 600	2 x 4	61,5	48,4